




TRADE

ALUMINIUM BI-FOLD DOOR SYSTEM

JANUARY 2017

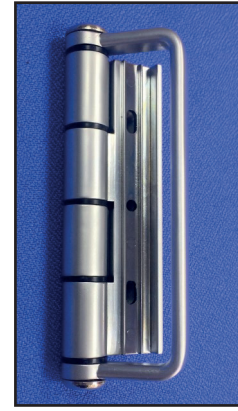

Unifold Options

- ◆ Doors and panels can be used in any configuration, style and design
- ◆ All configurations are available in both open-in and open-out options
- ◆ Full range of suited hardware available
- ◆ Glazing size of 28mm
- ◆ Available in any single RAL colour or dual colour option


Unifold Performance

- ◆ High security hinges and locking mechanisms as standard
- ◆ Shootbolts top and bottom of the interlocks for security
- ◆ Unique high strength roller design for increased weight capacity
- ◆ Dedicated bottom bogey guide for consistent operation and increased security
- ◆ Double track threshold allowing greater stability




Design Features of the Unifold Bi-Folding Door

- ◆ Internally beaded with a softline detail to all external doors and panels
- ◆ Square bead option
- ◆ 4 stainless steel wheels ensures smooth and consistent operation
- ◆ Unique, flush line handle that allows maximum door opening
- ◆ Low threshold options - please contact us for further details

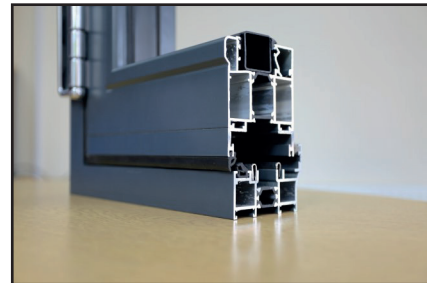

Unifold Configurations

Available in a range of styles and designs, panels can be stacked inside or outside of the room, to the left, right or split to stack on both sides. Door sets can be manufactured to replace entire walls to maximise your opening space.

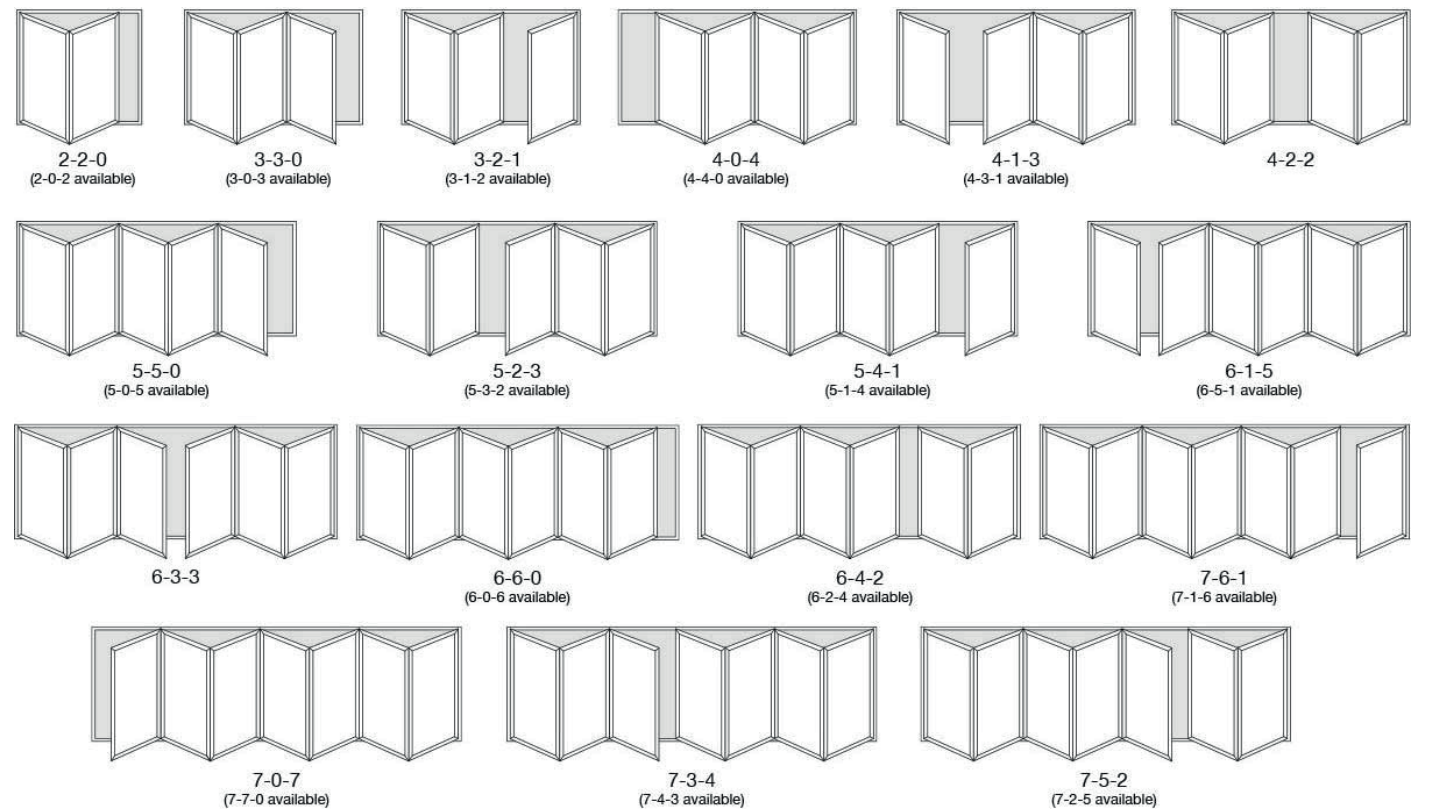

MINIMUM HEIGHT	MAXIMUM HEIGHT
1600mm	2500mm**
MINIMUM WIDTH	MAXIMUM WIDTH
1600mm	6000mm**
MAXIMUM SASH WEIGHT	
100kgs**	

VARIATIONS
Individual panel width not to exceed 1000mm
Panel heights, widths and weights are dependent on style and design
**The sizes detailed above are for guidance only
Please contact our Technical Office for further details